




ALPTECH INTERNATIONAL C/O MENGI ENGINEERING COMPANY

Address: Plot No. A/232, Road No. 21, 'Y' Lane, Wagale Estate, Thane-400 604. INDIA. | **Telephone No.:** +91 9769976747 / 22-25823203
Email.: alptechinternational@gmail.com | **Web.:** www.alptechindia.com | **PAN NO.:** AARCA9816A | **GST No.:** 27AARCA9816A1ZJ

DOUBLE HEAD CNC CUTTING BOTTOM SAW DIA 600X4200

CUTTING SAW / DOUBLE HEAD CUTTING MACHINE

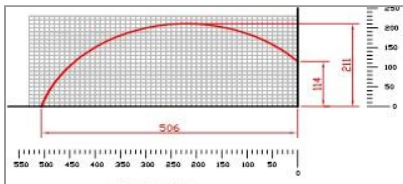

Sale Office: Office No 9 Gound Floor Sakhi House, Trombay Road, Chembur East, Mumbai - 400071. | **Warehouse:** Gala No 9, A 6 Block, Padmini Complex Off Kalher Naka, Bhiwandi. | **Telephone No.:** 91 9769976747 | **Email:** alptechinternational@gmail.com



ALPTECH INTERNATIONAL C/O MENGI ENGINEERING COMPANY

Address: Plot No. A/232, Road No. 21, 'Y' Lane, Wagle Estate, Thane-400 604. INDIA. | **Telephone No.:** +91 9769976747 / 22-25823203
Email.: alptechinternational@gmail.com | **Web.:** www.alptechindia.com | **PAN NO.:** AARCA9816A | **GST No.:** 27AARCA9816A1ZJ

Description:

DESCRIPTION

Main features 1. It is used for cutting aluminum alloy and curtain wall profile 2. It has features of high efficiency, perfect safe guards and is suitable for large-scale production 3. The CNC technology can cut different standards profile automatically 4. Adopt steel structure design to ensure excellent reliability, no easy to be out of shape 5. The main shaft with hi-precision makes the saw operating stable and the cutting surface smooth 6. The imported guide rails and the linear motion pair can realize high precision and accurate location 7. The heads return automatically 8. The two-way location and clamping features with high precision and steadiness 9. The well-sealed safeguard of saw blade prevents the cutting bits from flowing everywhere 10. The cutting angle can change in 45°-90°

Specification:

Processing accuracy Repeat locating length $\pm 0.2\text{mm}$ Cutting profile surface plane $\pm 0.10\text{mm}$

Cutting angle tolerance $\pm 5'$ Main Technical Parameter Cutting Motor Power $2 \times 2.2\text{kw} + 1.5\text{kw}$ Input voltage 440V 50hz Main Rotary Speed 3850r/min Cutter Diameter Inner 30mm Outside 600mm

Cutting Length Min 435mm Max 4200mm Cutting Height 90° 200 mm 45° 150 mm

Product Code: PRO-251

Country:  Korean

HSN Code: 0

Unit: 0

Gross Weight: 0

Net Weight:

Dimension: 5560*1750*1950MM