




ALPTECH INTERNATIONAL

Address: Plot No. A/232, Road No. 21, 'Y' Lane, Wagle Estate, Thane-400 604. INDIA. | **Telephone No.:** +91 9769976747 / 22-25823203
Email.: alptechinternational@gmail.com | **Web.:** www.alptechindia.com | **PAN NO.:** AARCA9816A | **GST No.:** 27AARCA9816A1ZJ

ANDROMEDA 700 UPSTROKE SAW

CUTTING SAW / SINGLE HEAD CUTTING MACHINE

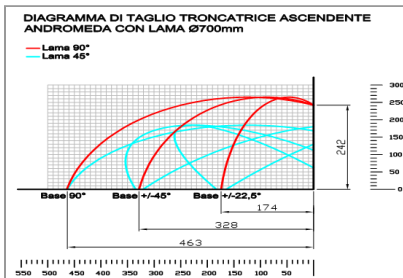

Model	Spazio				Peso	
	Ø550	Ø700	Ø850	Ø1000	Netto	Grezzo
L	1620	1200	1600		Kg. 715	
W	1900	1310	1680		Kg. 820	
H						

Sale Office: Office No 9 Gound Floor Sakhi House, Trombay Road, Chembur East, Mumbai - 400071. | **Warehouse:** Gala No 9, A 6 Block, Padmini Complex Off Kalher Naka, Bhiwandi. | **Telephone No.:** 91 9769976747 | **Email:** alptechinternational@gmail.com



ALPTECH INTERNATIONAL

Address: Plot No. A/232, Road No. 21, 'Y' Lane, Wagle Estate, Thane-400 604. INDIA. | **Telephone No.:** +91 9769976747 / 22-25823203
Email.: alptechinternational@gmail.com | **Web.:** www.alptechindia.com | **PAN NO.:** AARCA9816A | **GST No.:** 27AARCA9816A1ZJ

Description:

DESCRIPTION -

ANDROMEDA 700 COMPOUND MITER SAW

The ANDROMEDA 700 is a single head upcut compound miter saw complete with a Ø700 mm carbide tipped blade for precision cutting of Aluminum and PVC material. The fully adjustable blade

advancement system lets you control the stroke of the hydro-pneumatic cylinder. The tilting of the blade is pneumatically operated from 90° to 45°, while the intermediate angles can be obtained with manual mechanical stop; the rotation of the table is manual with fixed stops at 45°/90°/135°, intermediate positions from 22.5° on the right to 157.5° on the left by pneumatic locking. This machine

is equipped with a digital angle display to read the rotation angle for easy operator use.

The start cycle of the blade is determined through an inverter, which allows the set up of blade advancement only when the desired RPM is reached; this device allows obtaining both a better starting and stopping of the blade.

The upward movement of the blade cuts with little pressure on the profile and facilitates precise and accurate cuttings. Dust collection can be achieved through the evacuation port located on the rear of the machine.

Product Code: PRO-8

Country:  Italian

HSN Code: 0

Unit: 0

Gross Weight: 1230KG

Net Weight: 1200KG

Dimension: L1610*W1900*H1700

Specification:

COMPONENT SUPPLIED:

- Carbide saw blade Ø700 mm
- Hydro-pneumatic blade feeding
- Full, pneumatic actuated, protection enclosure
- N.2 Horizontal clamps
- N.2 Vertical clamps
- Pneumatic mist spray
- Motor 7,5 Kw
- Blade speed 1500 RPM
- Rotation from 22.5° to 157.5°, the angle can be read on a digital display, pneumatic locking.

Sale Office: Office No 9 Gound Floor Sakhi House, Trombay Road, Chembur East, Mumbai - 400071. | **Warehouse:** Gala No 9, A 6 Block, Padmini Complex Off Kalher Naka, Bhiwandi. | **Telephone No.:** 91 9769976747 | **Email:** alptechinternational@gmail.com



ALPTECH INTERNATIONAL

Address: Plot No. A/232, Road No. 21, 'Y' Lane, Wagle Estate, Thane-400 604. INDIA. | **Telephone No.:** +91 9769976747 / 22-25823203
Email.: alptechinternational@gmail.com | **Web.:** www.alptechindia.com | **PAN NO.:** AARCA9816A | **GST No.:** 27AARCA9816A1ZJ

- Tilting from 90° to 45°, intermediate angles

with mechanical stop

- Working pressure: 7 bar